






TECAPRES®

Ø63mm · G1/8 connectable
1500daN




MICRO 63CF

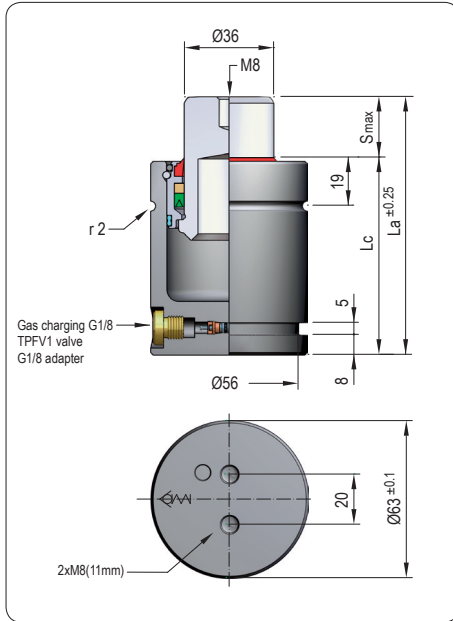

Pressure medium	Gas Nitrógeno (N ₂)
Max. charging pressure	150 Bar
Min. charging pressure	35 Bar
Rod seal area	19,18 cm ²
Operating temperature	0°C - 80°C
Force increase by temperature	0,33 %/°C
Max. stem speed	1,6 m/s
Maintenance kit	Kit M63CF

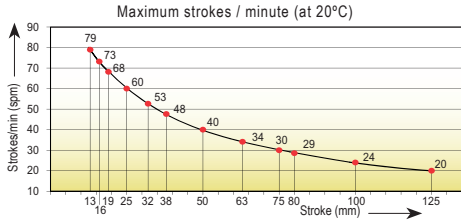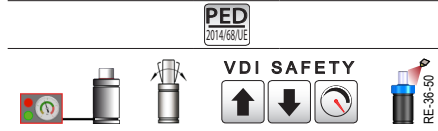

Code	Smax mm	La mm	Lc mm	Fa daN	90% F daN	100% Fc daN	P Bar	V l	Kg
MICRO 63CFx13	13	78	65	1500 ± 5% (20°C)	2135	2245	150 (20°C)	0,040	0,95
MICRO 63CFx16	16	84	68		2165	2275		0,048	0,97
MICRO 63CFx19	19	90	71		2200	2320		0,054	1,15
MICRO 63CFx25	25	102	77		2235	2365		0,069	1,27
MICRO 63CFx32	32	116	84		2265	2405		0,086	1,35
MICRO 63CFx38	38	128	90		2280	2425		0,101	1,40
MICRO 63CFx50	50	152	102		2305	2455		0,131	1,55
MICRO 63CFx63	63	178	115		2320	2470		0,162	1,71
MICRO 63CFx75	75	202	127		2330	2485		0,192	1,83
MICRO 63CFx80	80	212	132		2335	2490		0,204	1,95
MICRO 63CFx100	100	252	152		2345	2500		0,253	2,32
MICRO 63CFx125	125	302	177		2355	2510		0,315	2,82

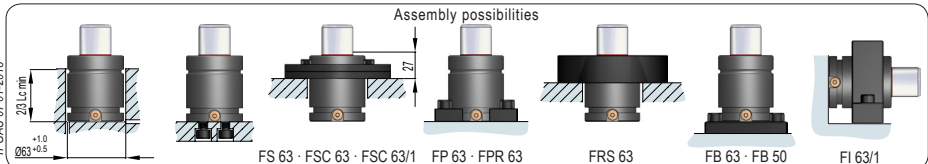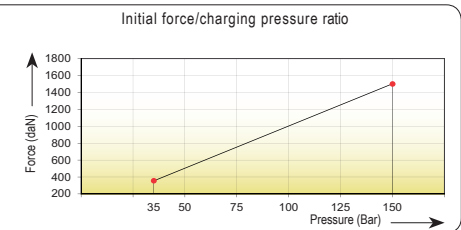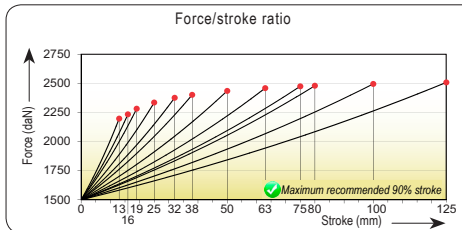

- MICRO
- TITAN
- TPH
- TPS
- TPSP
- TPF
- TPK
- TPC
- TPCT
- TPB
- TPR
- TPA
- TPG
- TPSR
- TPSRs
- TPNS
- STOP CYLINDER
- HOT FORMING
- TPHT
- TPSL