

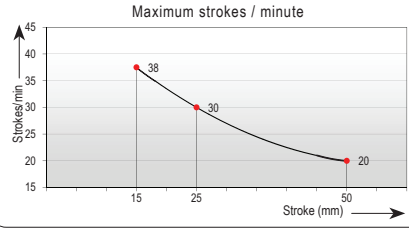
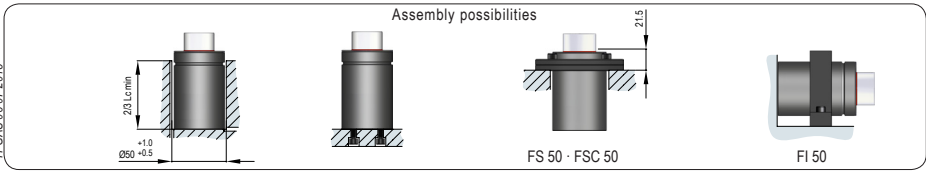


i Pressure medium **Gas Nitrógeno (N₂)**

Max. charging pressure	155 Bar
Min. charging pressure	50 Bar
Piston seal area	12,57 cm²
Operating temperature	0°C - 80°C
Force increase by temperature	0,33 %/°C
Max. stem speed	20 m/min
Maintenance kit	Kit F2000

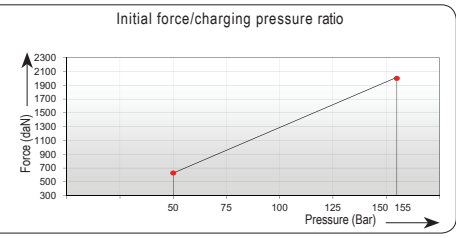

Code	Smax mm	La mm	Lc mm	Fa daN	F daN	Fc daN	P Bar	V l	Kg
TPF 2000x15	15	95	80	2000 (±5%)	2890	3040	155 (20°C)	0,055	0,70
TPF 2000x25	25	125	100		3055	3245		0,082	0,81
TPF 2000x50	50	200	150		3195	3420		0,151	1,05

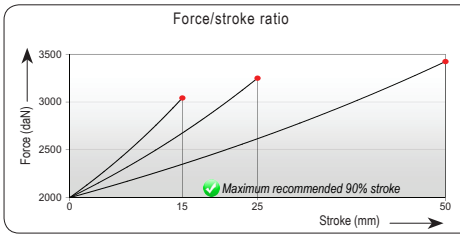

TRGAS 06/07-2015