

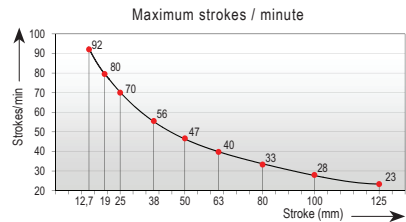
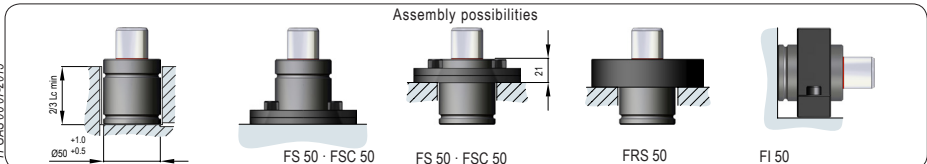


i Pressure medium	Gas Nitrógeno (N ₂)
Max. charging pressure	150 Bar
Min. charging pressure	35 Bar
Rod seal area	7,07 cm ²
Operating temperature	0°C - 80°C
Force increase by temperature	0,33 %/°C
Max. stem speed	1 m/s
Maintenance kit	Kit K1000

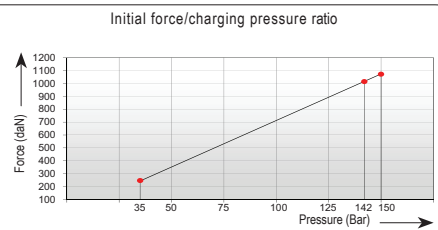

Code	Smax mm	La mm	Lc mm	R mm	Fa daN	90% F daN	100% Fc daN	P Bar	V l	Kg
TPK 1000x13	12,7	63,4	50,7	1	1000 (±5%)	1590	1700	142 (20°C)	0,022	0,59
TPK 1000x19	19	76	57	1		1635	1755		0,031	0,62
TPK 1000x25	25	88	63	1		1645	1770		0,041	0,69
TPK 1000x38	38	114	76	1		1660	1790		0,061	0,81
TPK 1000x50	50	138	88	1		1665	1795		0,080	0,91
TPK 1000x63	63	165	102	1		1670	1805		0,101	1,05
TPK 1000x80	80	198	118	1		1675	1805		0,127	1,20
TPK 1000x100	100	238	138	1		1675	1810		0,159	1,41
TPK 1000x125	125	290	165	3		1680	1815		0,198	1,55

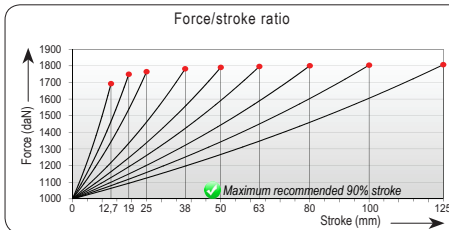

TEGAS 06 07-2015

