

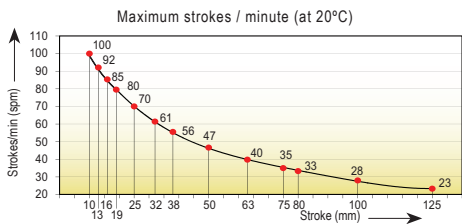
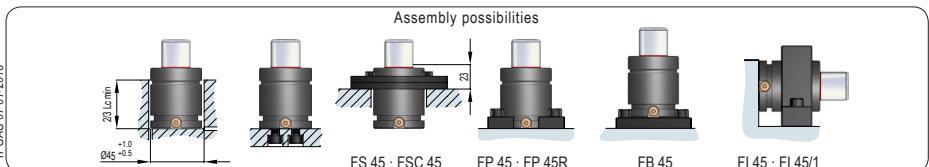


Pressure medium	Gas Nitrógeno (N ₂)
Max. charging pressure	150 Bar
Min. charging pressure	35 Bar
Rod seal area	4,91 cm ²
Operating temperature	0°C - 80°C
Force increase by temperature	0,33 %/°C
Max. stem speed	1,6 m/s
Maintenance kit	Kit MC45

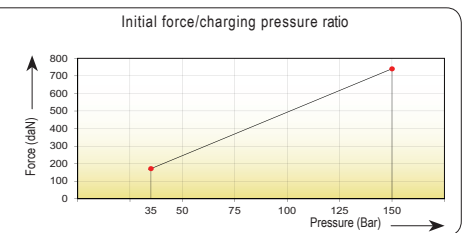

Code	Smax mm	La mm	Lc mm	Fa daN	90% F daN	100% Fc daN	P Bar	V l	Kg
MICRO 45Cx10	10	62	52	740 ±5% (20°C)	1060	1115	150 (20°C)	0,014	0,32
MICRO 45Cx13	13	68	55		1080	1140		0,018	0,35
MICRO 45Cx16	16	74	58		1095	1160		0,022	0,39
MICRO 45Cx19	19	80	61		1105	1170		0,025	0,40
MICRO 45Cx25	25	92	67		1120	1190		0,032	0,44
MICRO 45Cx32	32	106	74		1130	1200		0,041	0,47
MICRO 45Cx38	38	118	80		1135	1210		0,048	0,50
MICRO 45Cx50	50	142	92		1145	1220		0,062	0,59
MICRO 45Cx63	63	168	105		1150	1225		0,078	0,65
MICRO 45Cx75	75	192	117		1155	1230		0,092	0,80
MICRO 45Cx80	80	202	122		1155	1230		0,098	0,85
MICRO 45Cx100	100	242	142		1155	1235		0,122	0,98
MICRO 45Cx125	125	292	167		1160	1240		0,151	1,15

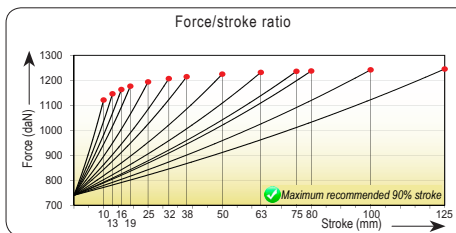

TFGAS 07-01-2018

